KENWOOD **BASIC M1A**

STEREO POWER AMPLIFIER

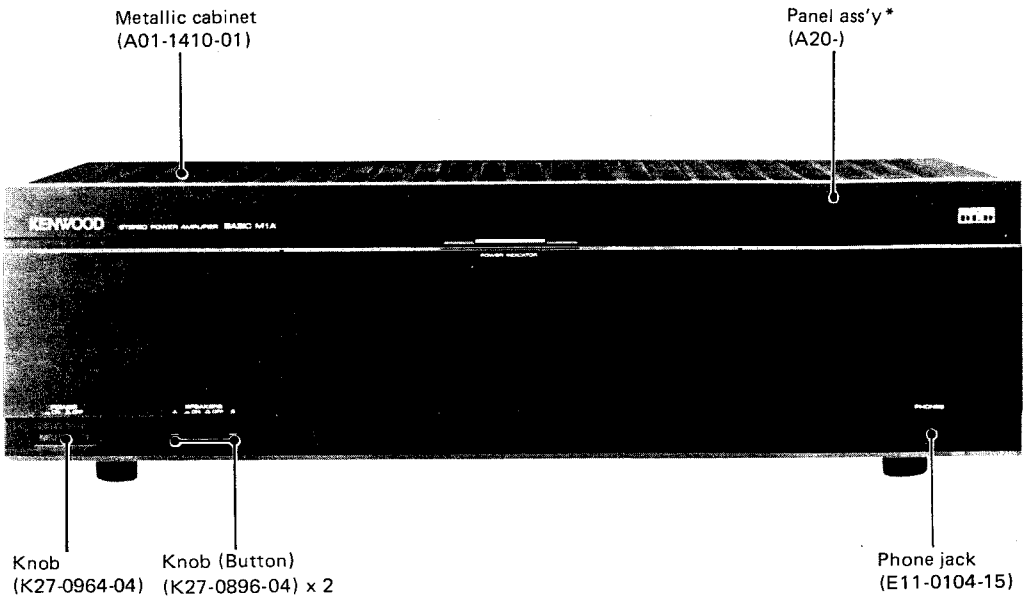

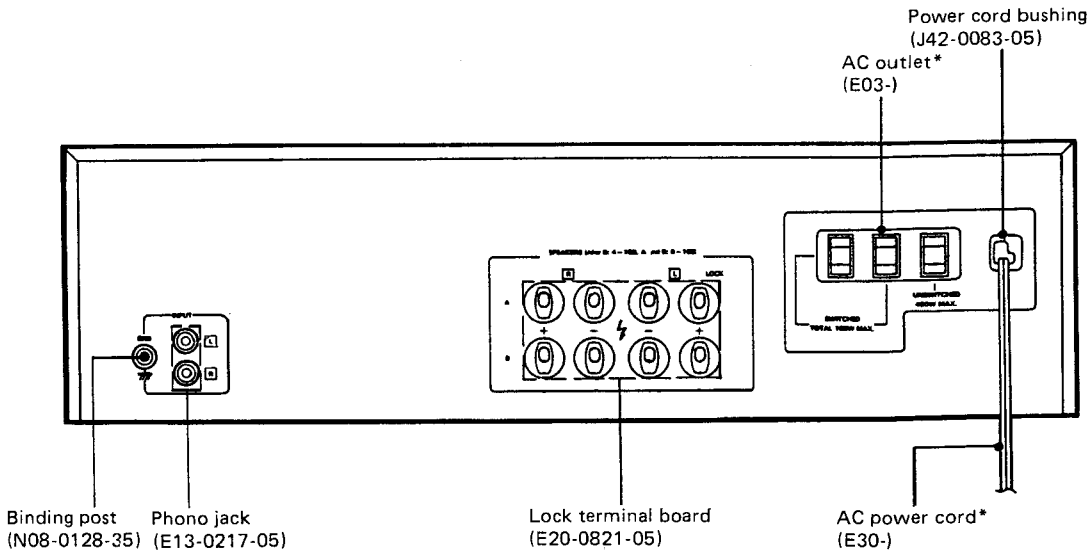

* Refer to patts list on page 6.

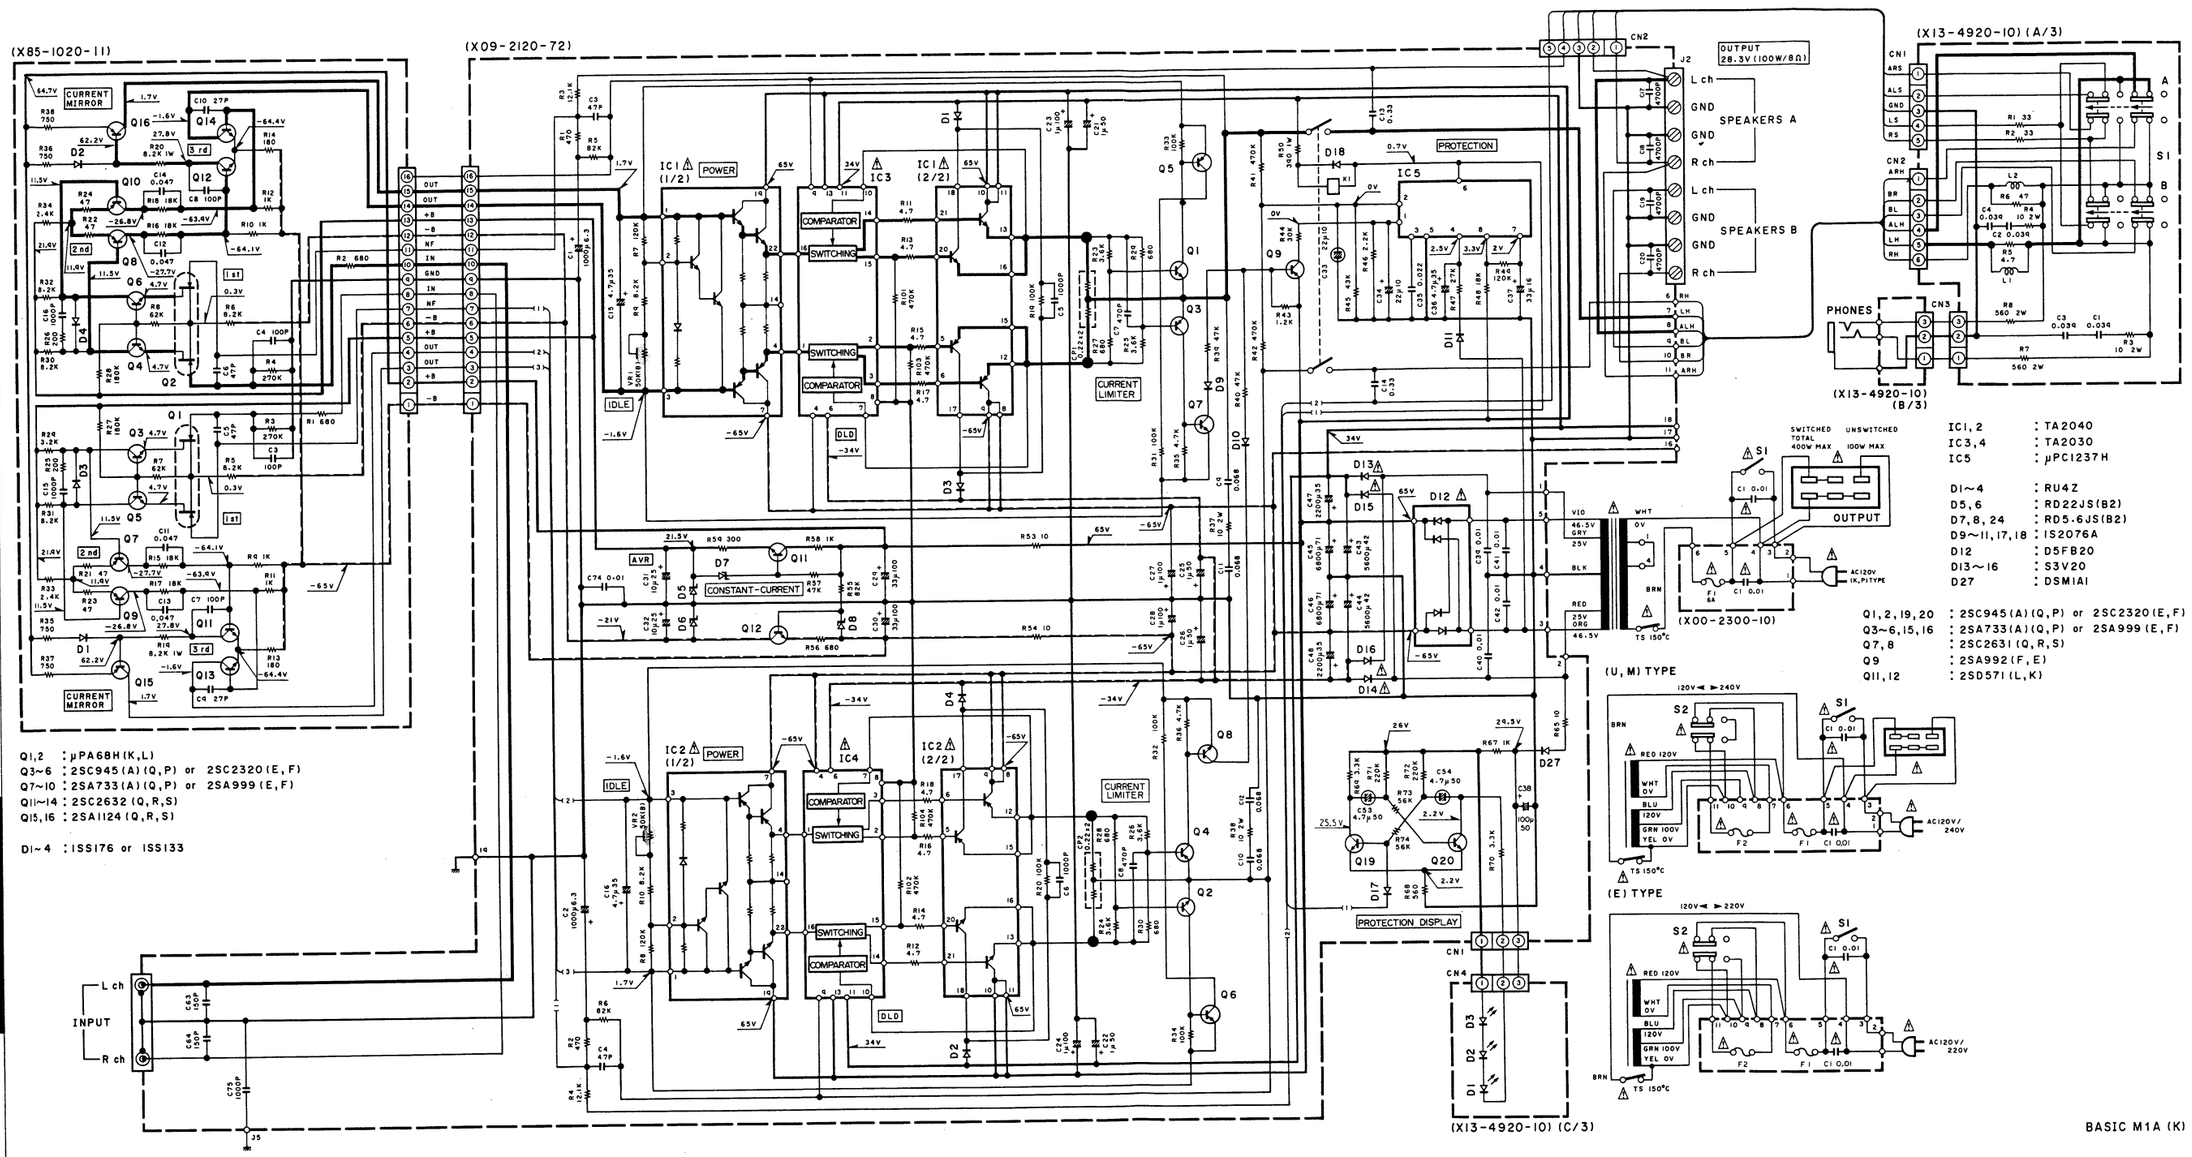

Q1,2 : μPA68H(K,L)
Q3~6 : 2SC945(A)(Q,P) or 2SC2320(E,F)
Q7~10 : 2SA733(A)(Q,P) or 2SA999(E,F)
Q11~14 : 2SC2632(Q,R,S)
Q15,16 : 2SA1124(Q,R,S)

D1~4 : ISS176 or ISS133

IC1,2 : TA2040
IC3,4 : TA2030
IC5 : μPC1237H

D1~4 : RU4Z
D5,6 : RD22JS(B2)
D7,8,24 : RD5.6JS(B2)
D9~11,17,18 : IS2076A
D12 : D5FB20
D13~16 : S3V20
D27 : DSM1AI

Q1,2,19,20 : 2SC945(A)(Q,P) or 2SC2320(E,F)
Q3~6,15,16 : 2SA733(A)(Q,P) or 2SA999(E,F)
Q7,8 : 2SC2631(Q,R,S)
Q9 : 2SA992(F,E)
Q11,12 : 2SD571(L,K)

2SA1124 2SC2320
2SA733 2SC2631
2SA992 2SC2632
2SA999 2SC945

2SD571

μPA68H

μPC1237H

TA2030

TA2040

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). ⚠Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

- DC voltages are as measured with a high impedance voltmeter with no signal input. Values may vary slightly due to variations between individual instruments or/and units.
- Les tensions c.c. doivent être mesurées avec un voltmètre à haute impédance sans signal d'entrée. Les valeurs peuvent différer légèrement du fait des variations inhérentes aux appareils et aux instruments de mesure individuels.
- Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen. Voltmeter ohne Eingangssignal gemessen. Dabei schwanken die Meßwerte aufgrund von Unterschieden zwischen einzelnen Instrumenten oder Geräten u.U. geringfügig.

BASIC M1A (K)

BASIC M1A

KENWOOD